



AVERY DENNISON[®] MONARCH[®] TABLETOP PRINTER 1

Improve inventory management through integrated solutions from manufacturing source to consumer that increase speed, accuracy, visibility, productivity and margins.

The Avery Dennison Tabletop Printer 1 (ADTP1™) is built to accelerate your bar code and RFID label and tag printing, encoding, verifying, cutting and stacking so you move your merchandise quickly and accurately through the supply chain.

Engineers around the globe have collaborated to offer a solution rich in design and unique features. Quite simply, ADTP1 is our best ever, RFID encoding and medium volume printing solution. It offers:

- Increased productivity, decreased downtime
- Increased profit potential by reducing costs and vendor chargeback risk
- Ease of use, minimal integration
- Reduced environmental impact elevates brand
- Maximum protection and durability

FOR A WIDE RANGE
OF MARKING APPLICATIONS

TABLETOP PRINTER

1

CARTON/PALLET LABELING
RETAIL COMPLIANCE
ITEM-LEVEL MARKING/TRACKING
WORK-IN-PROCESS TRACKING
HANG TAGS
ASSET TRACKING

Inventory Accuracy, Visibility and Loss Prevention



Retail Branding and
Information Solutions

Avery Dennison® Monarch® Tabletop Printer 1

INCREASED PRODUCTIVITY, DECREASED DOWNTIME

- Super-fast processing offers print speeds of up to 12ips
- The largest internal supply capacity available in its class cuts roll change needs by as much as 50%*
- Industry-leading, non-stop RFID encoding and verification at 8 ips eliminate stopping or back feeding to encode**
- Three-color backlit display provides instant visual identification of printer status for quick, easy resolution of error conditions
- State-of-the-art, dual-band 802.11 a/b/g/n provides robust, reliable wireless connectivity by enabling band switching in noisy environments**
- Internal liner take-up eliminates waste accumulating on floors for faster and easier liner disposal

INCREASED PROFIT POTENTIAL BY REDUCING COSTS AND VENDOR CHARGEBACK RISK



- Exclusive built-in RFID verifier overstrikes "bad" labels and tags and immediately alerts operator, delivering both speed and encoding accuracy
- Avery Dennison Barcode Assured™ reduces printing unreadable bar codes with a patented, fail-safe, dot shifting auto-correct feature that also extends print head life***
- Ultra-reliable dual motor ribbon control produces consistently high quality print while eliminating clutch and belt replacement

EASE OF USE, MINIMAL INTEGRATION

- Exclusive enhanced media sensing system requires no operator sensor adjustment for easy, fast setup and switching between print jobs
- Network-ready out of the box to interface with your existing infrastructure
- Tilting print head and lighted paper path enable easy supply loading
- Colored touchpoints guide operator interaction
- User replaceable snap-in print head requires no tools or recalibration adjustment
- Compatible with most existing Avery Dennison Monarch software, label formats, data streams, ribbons and supplies

12ips PROCESSING

8ips NON-STOP
RFID ENCODING
AND VERIFICATION

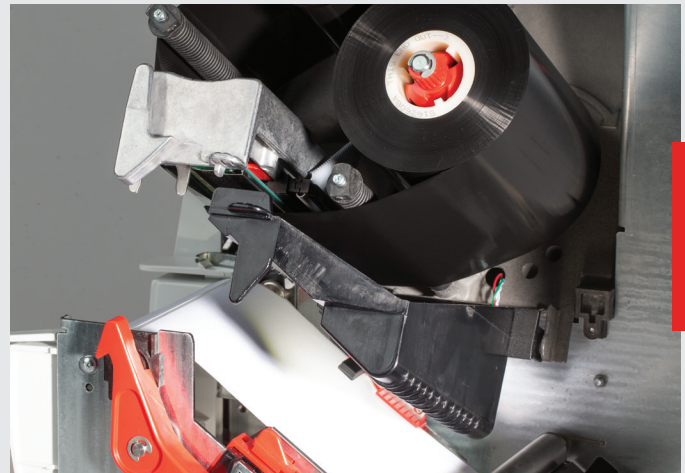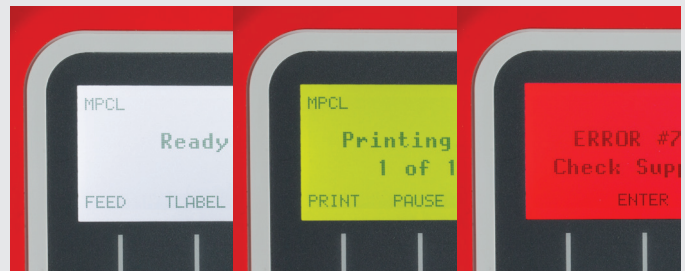

* When combined with Avery Dennison EcoCapacity+™ thin liner supplies

**Optional features

***Avery Dennison Barcode Assured™ helps eliminate unreadable bar codes by printing a gray box in place of an invalid bar code when dot shifting does not fix the problem.

The information contained herein is believed to be reliable but Avery Dennison makes no representations concerning the accuracy or correctness of the data. This product, like any other, should be tested by the customer/user thoroughly under end user conditions to ensure the product meets the particular requirements. Independent results may vary. Avery Dennison and the logo are registered trademarks of Avery Dennison Corp. Third party trademarks and/or trade names used herein are the property of their respective owner(s). Avery Dennison liability is limited to the replacement value of defective products. In no event shall Avery Dennison be held liable for consequential, indirect or incidental damages. Products, information and specifications are subject to change without notice. Avery Dennison and the logo are registered trademarks of Avery Dennison Corp. Third party trademarks and/or trade names used herein are the property of their respective owner(s). © 2014 Avery Dennison Corporation, All Rights Reserved. Patent Pending.

Inventory Accuracy, Visibility and Loss Prevention




Retail Branding and
Information Solutions

Avery Dennison® Monarch® Tabletop Printer 1

REDUCED ENVIRONMENTAL IMPACT ELEVATES BRAND

- EcoCapacity™ thin-liner material reduces carbon footprint and extends production between roll changes
- More labels per roll mean less downtime as well as reduced packaging and storage requirements

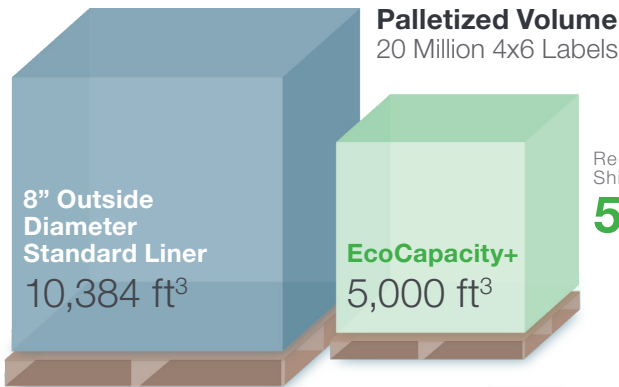

- Avery Dennison Tabletop Printer 1 is an ENERGY STAR® qualified product*
ENERGY STAR is a U.S. Environmental Agency voluntary program that helps businesses and individuals save money and protect our climate through superior energy efficiency. Learn more at energystar.gov




MAXIMUM DURABILITY AND PROTECTION

- Metal cover gives maximum protection in industrial environments
- Die-cast aluminum pivot plate, print head carrier and supply holder increase durability

ELEVATING BRANDS. ACCELERATING PERFORMANCE.

Experience Avery Dennison supply chain solutions at our worldwide Customer Design and Innovation Centers. For more information on the Avery Dennison Tabletop Printer 1 or to schedule a tour of our Customer Design and Innovation Centers, please call 800.543.6650, prompt 5, or e-mail rbis.solutions@averydennison.com.

To learn more or receive complete warranty information as well as other terms and conditions, please contact your Avery Dennison representative or visit our website at www.rbis.averydennison.com.

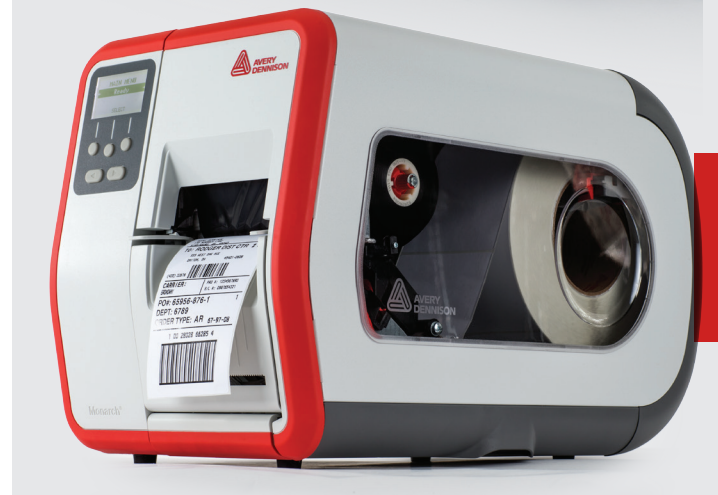

* ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency. ENERGY STAR products are third-party certified by an EPA-recognized Certification Body. ENERGY STAR certification is not applicable to all ADTP1 models.

The information contained herein is believed to be reliable but Avery Dennison makes no representations concerning the accuracy or correctness of the data. This product, like any other, should be tested by the customer/user thoroughly under end user conditions to ensure the product meets the particular requirements. Independent results may vary. Avery Dennison and the logo are registered trademarks of Avery Dennison Corp. Third party trademarks and/or trade names used herein are the property of their respective owner(s). Avery Dennison liability is limited to the replacement value of defective products. In no event shall Avery Dennison be held liable for consequential, indirect or incidental damages. Products, information and specifications are subject to change without notice. Avery Dennison and the logo are registered trademarks of Avery Dennison Corp. Third party trademarks and/or trade names used herein are the property of their respective owner(s). © 2014 Avery Dennison Corporation, All Rights Reserved. Patent Pending.

Inventory Accuracy, Visibility and Loss Prevention

Avery Dennison® Monarch® Tabletop Printer 1

STANDARD FEATURES

DIMENSIONS

Height: 13.8" (351mm)
Width: 11.5" (292mm)
Depth: 21.5" (546mm)

WEIGHT

32 lbs (14.5kg)

SHIPPING WEIGHT

37 lbs (16.8kg)

PRINTING METHOD

Thermal Direct or Thermal Transfer

BAR CODES

One-dimensional—UPCA +2/+5, UPCE +2/+5, EAN8 +2/+5, EAN13 +2/+5, EAN128 Interleaved 2 of 5, Extended Code 39, Codabar (NW7), Code 128, Code 16K, Code 93, MSI, Postnet, Intelligent Mail, GS1 Databar

Two-dimensional—PDF417, MaxiCode, Data Matrix (ECC-200), Quick Response (QR) Code, Aztec

STANDARD FONTS

Bitmap—Standard, Reduced, Bold, OCRA-like, CG Triumvirate, and CG Triumvirate Bold TrueType®—EFF Swiss Bold, Supports downloaded double-byte TrueType and bitmap fonts, allowing for international character sets

FONT MAGNIFICATION

1x to 7x
4 to 250 pt. for scalable/TrueType™ fonts

MEDIA SENSING METHOD

Edge: Die Cut, Black Mark, Aperture, Attacher Hole
Center: Die Cut, Black Mark, Attacher Hole

KEYPAD/DISPLAY

Five-button keypad control LCD Graphical Dot Matrix (128W x 64H dots). 2.54" (64.5mm) Wide x 1.46" (37.0 mm) High

PRINTER CONTROL LANGUAGE(S)

MPCL, MLI, EasyPlug

WRITER WARRANTY

One (1) year parts and labor. Full written warranty statement available on request.

PRINT HEAD WARRANTY

One (1) million inches or six (6) months, whichever occurs first.

SUPPLIES

Avery Dennison supplies are recommended.

SUPPLY TYPES

Tags and adhesive labels (paper or synthetic) in roll or fanfold format, perforated or continuous supply

SUPPLY SIZES

Width: 0.75–4.25" (19.1 to 108.0 mm)
Length: 0.32"–17.5" (8mm to 445mm)
Max Roll Diameter: 9.375" OD (238 mm) on 3" Core (76mm) or 4" Core (102mm)

TYPICAL SUPPLY ROLL LENGTH

7,874" (200m) with standard media
11,811" (300m) with EcoCapacity+

SUPPLY THICKNESS

5.5–13.5 mils (0.14–0.33mm)

MAXIMUM PRINT AREA

4.0" x 16.0" (102 mm x 406 mm) with the 203 dpi print head
4.0" x 13.0" (102 mm x 330 mm) with the 300 dpi print head
Larger images (up to 16 feet) can be printed using continuous supply and reallocating memory

RIBBON LENGTH

23,622" (600m)
Core: 1" (25.4mm) plastic

RFID

RFID ENCODER

Optional, EPCglobal UHF Class 1 Gen 2 / ISO 18000-63 (formerly 18000-6C). Supports worldwide UHF RFID frequency ranges.

RFID VERIFIER

Optional, integrated post-encode-and-print reader module. Validates actual encoded data against requested data.

ENVIRONMENTAL RANGES

OPERATING TEMPERATURE

Thermal Direct 40° to 104° F (4° C to 40° C)
Thermal Transfer 40° to 95° F (4° C to 35° C)

STORAGE

15° to 120° F (-9° C to 49° C)

HUMIDITY/OPERATING AND STORAGE

5% to 90% non-condensing

PERFORMANCE

POWER SOURCE

100–240 VAC with auto select 50/60 Hz
Optional 24 VDC (U.S. and Canada Only)

PRINT SPEED

2.5 ips (64 mm/sec)
4 ips (102 mm/sec)
6.0 ips (152 mm/sec)
8.0 ips (203 mm/sec)
10.0 ips (254 mm/sec)—only with 203 dpi print head
12.0 ips (305 mm/sec)—only with 203 dpi print head

COMMUNICATIONS

STANDARD COMMUNICATION PORTS

USB 2.0 Device Port (1 port, B receptacle), USB 2.0 Host Port (2 ports, A receptacle), RS-232C Serial Port (DB-9F, DTE pin out, 115.2K baud max comm. speed)

WIRED NETWORKING

802.3u Ethernet, 10/100 Mbps, RJ-45 connector

WIRELESS NETWORKING

Optional 802.11 a/b/g/n dual band (2.4GHz & 5 GHz), WPA2, 802.11i compliant

OPTIONS & ACCESSORIES

OPTIONS

- 300 dpi print head
- Peel mode with on demand sensor
- Peel mode with on demand sensor and internal liner take-up*
- ADK Script programming for special applications
- +24V DC-powered (Cart ready)*

OPTIONS

- 933™ High Speed Cutter*
- 928™ Stacker*
- 935™ Rewind
- 938™ Verifier*
- 939I™ Intelligent Keyboard

* Available on EF model only



Retail Branding and
Information Solutions

AMERICAS

170 Monarch Lane
Miamisburg, OH 45342
937 865 2123 (direct)
Tel +800 543 6650
(8:00 a.m. – 6:30 p.m., EDT)
Fax +937 865 6663

ASIA

No. 7 Chun Ying Street
Tseung Kwan O Industrial
Estate
New Territories, Hong Kong
Tel +852 2372 3169
Fax +852 2995 0014

EASTERN EUROPE, MIDDLE EAST AND AFRICA

Ohmstraße 3
85386 Eching
Germany
Tel +49 (0) 8165 925 0
Fax +49 (0) 8165 625 99

WESTERN EUROPE

1 Thomas Road
Wooburn Green
Bucks HP10 0PE
Tel +(44) 1628 859500
Fax +(44) 1628 859567

ASIA PACIFIC NEW SOUTH WALES

61 Vore Street
Silverwater NSW 2128
Tel +(02) 9647 1833
Fax +(02) 9647 1914
Toll free (Outside Sydney only)

**Elevating brands and
accelerating performance
throughout the global
retail supply chain**

The information contained herein is believed to be reliable but Avery Dennison makes no representations concerning the accuracy or correctness of the data. This product, like any other, should be tested by the customer/user thoroughly under end user conditions to ensure the product meets the particular requirements. Independent results may vary. Avery Dennison and the logo are registered trademarks of Avery Dennison Corp. Third party trademarks and/or trade names used herein are the property of their respective owner(s). Avery Dennison liability is limited to the replacement value of defective products. In no event shall Avery Dennison be held liable for consequential, indirect or incidental damages. Products, information and specifications are subject to change without notice. Avery Dennison and the logo are registered trademarks of Avery Dennison Corp. Third party trademarks and/or trade names used herein are the property of their respective owner(s). © 2014 Avery Dennison Corporation, All Rights Reserved. Patent Pending. 0709SNG.ENGVO1.0114LT.APP

rbis.averydennison.com